

KERA.MAT

COUPLING.BASIC TYPE 2A



CLAMPING RANGE

120-135

150-165

175-190

235-250

TKL  
34

MEASUREMENTS

Nominal size	Clamping range	Width	Thickness	Tightening torque
DN	outer d <sub>3</sub> mm	mm	mm	Nm
125	150-165	102	3,4	6

FURTHER CHARACTERISTICS

Package Quantity	Carton/Lattice box
------------------	--------------------


BRIEF DESCRIPTION

COUPLING.Basic is used to connect 2 pipe spigots in nominal sizes DN 100 to DN 500. COUPLING.Basic can be ordered in 2 versions: type 2A (normal type) and type 2B (wider version).

M-seals with compensation elements (bushes) in the sizes 4, 8, 12, 16, 24 and 32 mm for joining two pipe spigots with different external diameters from 160 to 1399 mm.



TOOLS & SERVICES

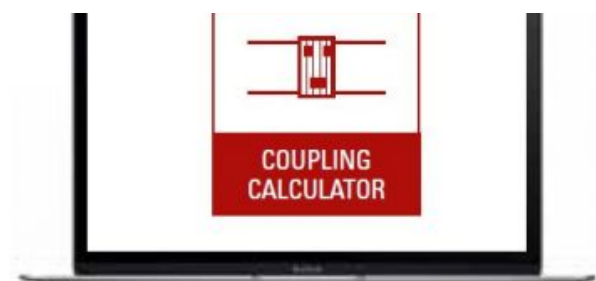

#### [COUPLING CALCULATOR >](#)

For connecting spigots, the Coupling Calculator works out the type of coupling and, if necessary, the quantity and type of compensating rings required.

#### [INSTALLATION INSTRUCTIONS](#)



Here you will find a detailed explanation for installation on the construction site.

[TO THE INSTRUCTIONS >](#)