


KERA.MAT CERAMIC COUPLING



TECHNICAL DRAWING

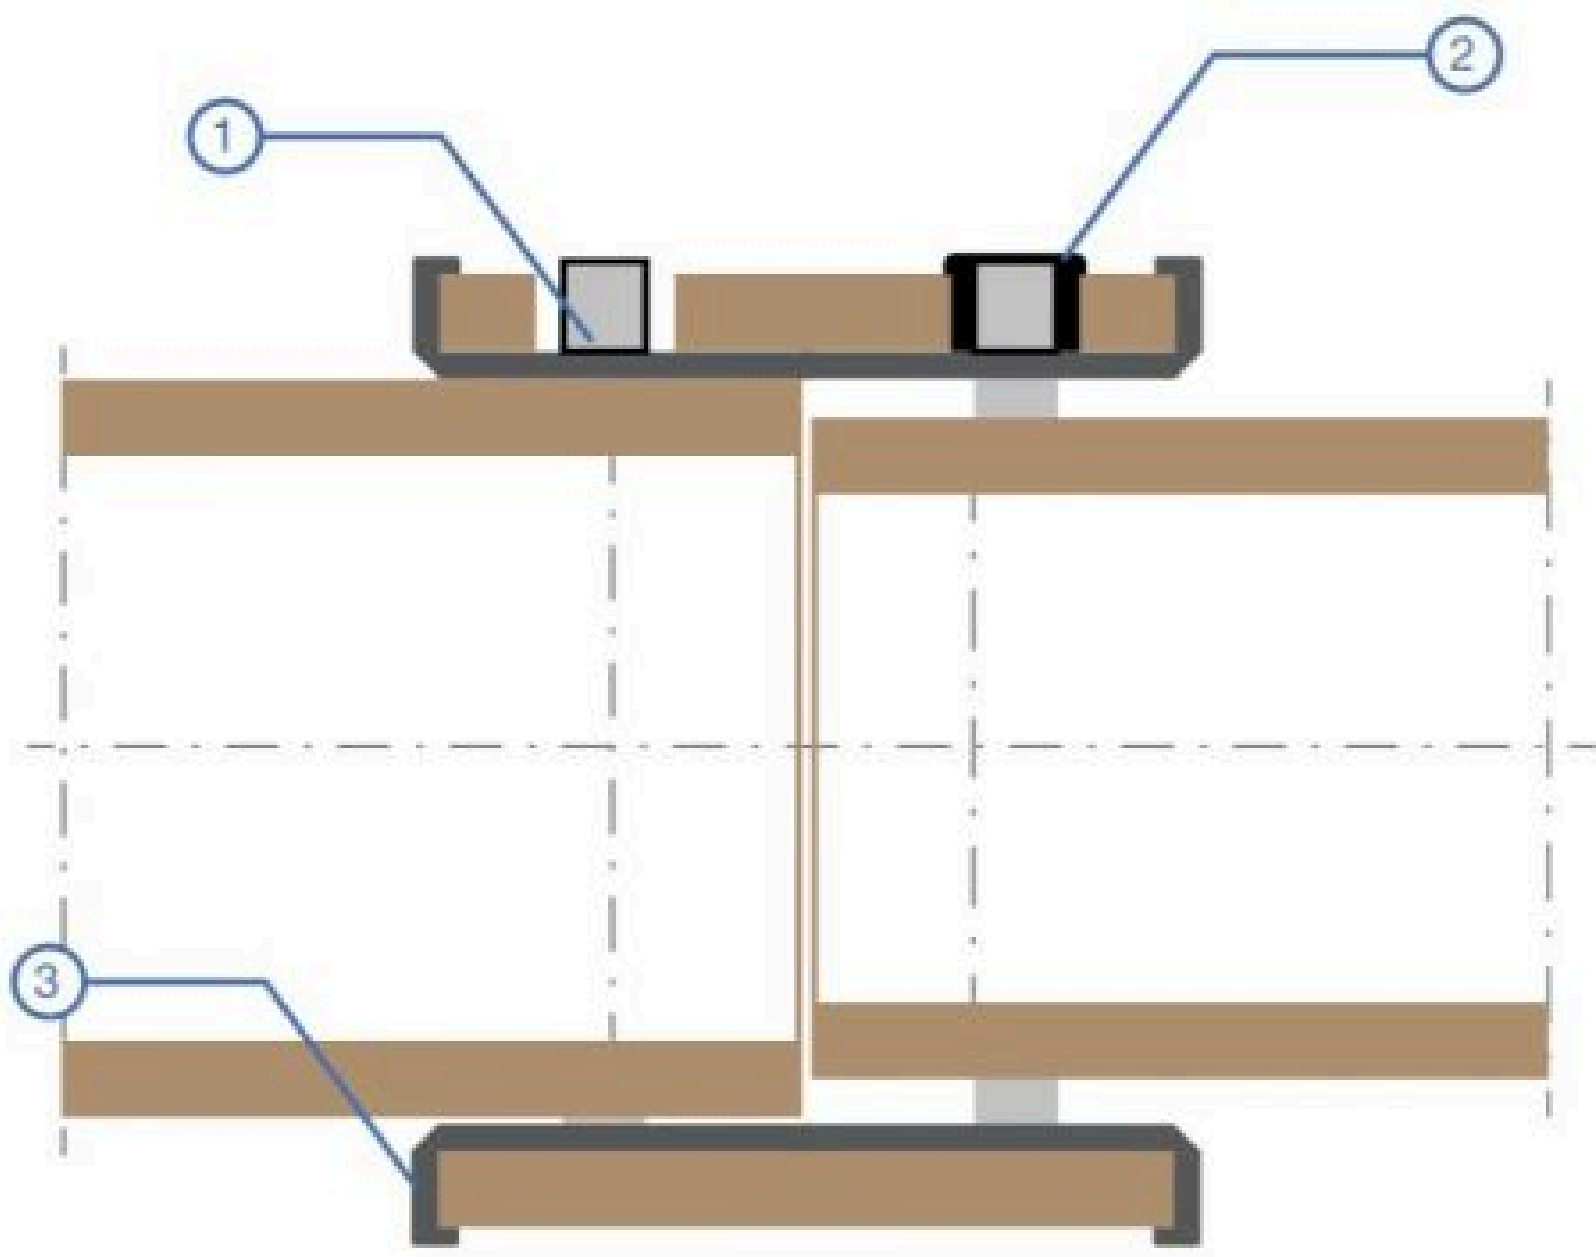

- 1: Spannband Keramikhülse
- 2: Verschlussstopfen und Zentriergummi für Keramikhülse
- 3: Dichtkörper Keramische Kupplung DN 200 N

NOMINAL SIZE: 200

BRIEF DESCRIPTION

Ideal for a complete system solution and only available from Steinzeug-Keramo: the ceramic coupling is optimized to connect KERA.Base DN 200 normal-strength pipes (strength class 200 and crushing strength FN 40). It is equally suited for connecting spigots in new installations and for retrofitting pipes and fittings. The simple clamping system enables fast, project-compliant assembly.

Clamp material: stainless steel 1.4301

Bonding between front face of rubber and sleeve prevents contact between water/subsoil and turnbuckles

CERAMIC SLEEVE

Length 175 mm

Internal diameter 270 mm

External diameter 310 mm

