


KERA.BASE
INLET CONNECTOR



TECHNICAL DRAWING

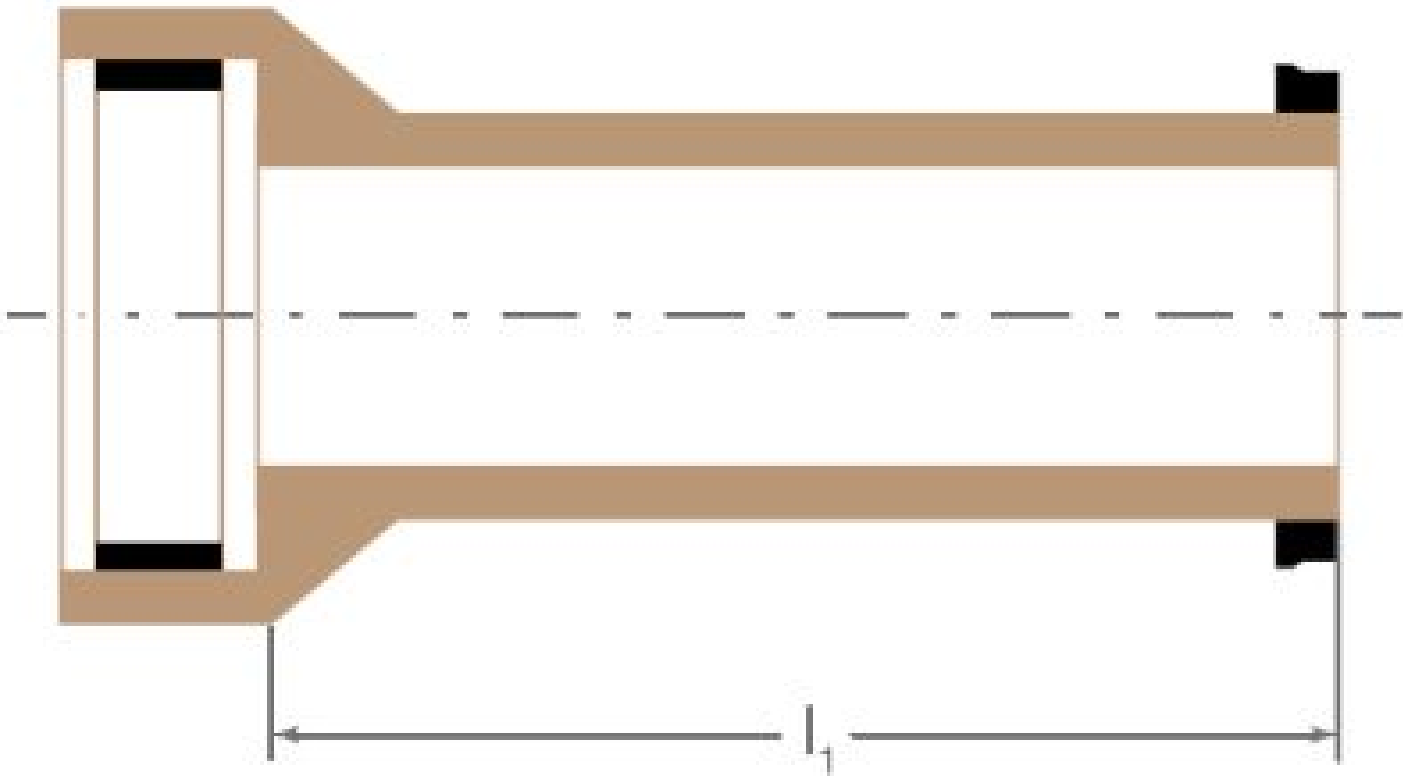

NOMINAL SIZE DN 600

150	200	250	300	350	400	500	600
-----	-----	-----	-----	-----	-----	-----	-----

JOINT

K	L
---	---

JOINT SYSTEM

C	F
---	---



WEIGHT	TKL	CRUSHING STRENGTH FN
197 kg/piece	95	57 kN/m

BRIEF DESCRIPTION

Articulated pieces are used for producing connections to structures such as shafts or gullies. There is a distinction between articulated pieces for the inlet (GZ) and the outlet (GA) and for installation in a building (GE). Installation pieces (GE) are completely or partially unglazed, thus guaranteeing a tight integration into the shaft wall.

Vitrified clay pipes and fittings are standardised in EN 295-1. Supplementary Requirements defines the certification program ZP WN 295.

All measurements - especially when connecting to third-party products - must be checked and depend on the specifications of EN 295 and on the certification program ZP WN 295. Subject to technical changes.

